




198.00 EUR
incl. 19% VAT, plus [shipping](#)

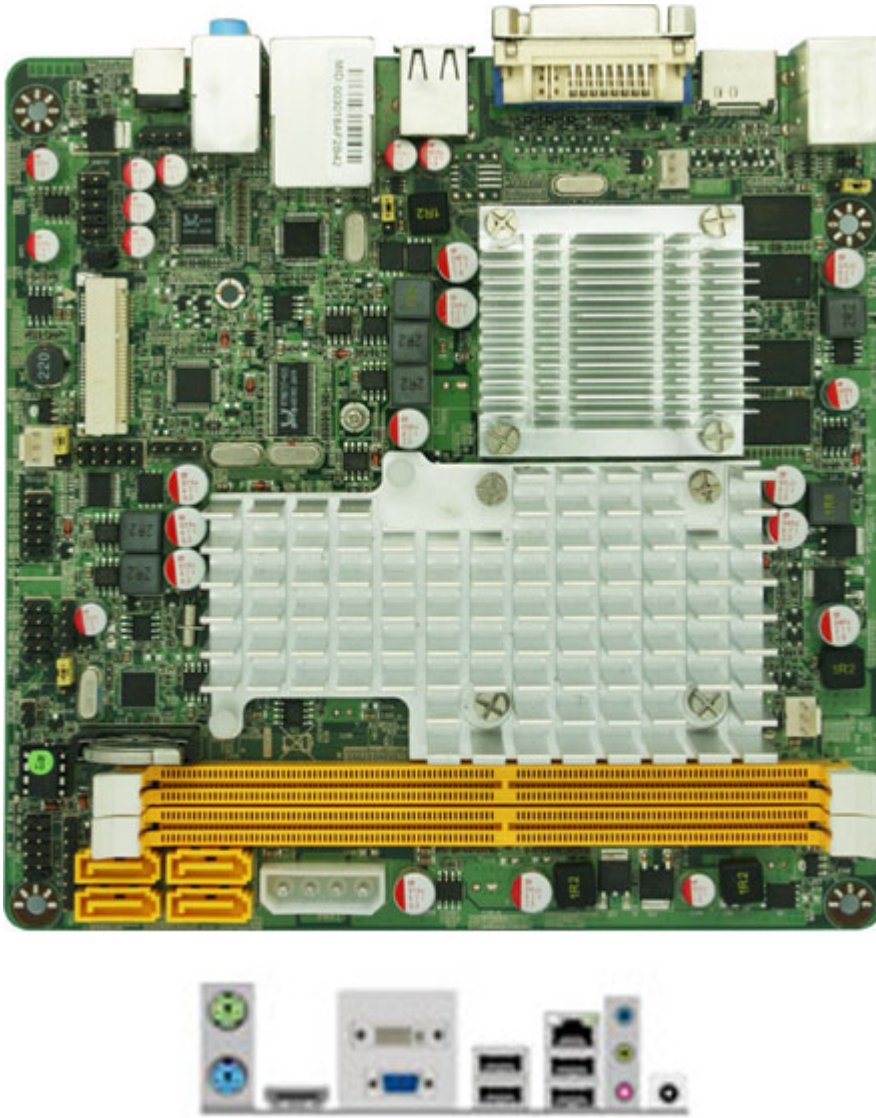

- INTEL® Atom Processor D510 / D525 + NM10 Express Chipset +NVIDIA® ION2 GPU
- Support INTEL® Atom Processor D510 / D525
- Support Single Channel DDR 800 / 667
- Supports 10 / 100 / 1000 LAN
- Integrated ALC662 HD Audio CODEC with 6-CH
- Compliance with EuP standard
- Support CPU Smart FAN
- Support ACPI S3 Function
- Support Power on board
- **CPU**
 - INTEL ® Atom Processor D510 (45nm, 1.66GHz,1024MB L2 Cache)
 - INTEL ® Atom Processor D525 (45nm, 1.80GHz,1024MB L2 Cache)
- **Chipset**
- **Memory**
 - INTEL® Atom Processor D510 / D525 +NM10 Express Chipset
 - 2 * 240-pin DIMM Sockets for un-buffered Single Channel DDR2 800/667 SDRAM up to 4 GB
- **Storage**
 - 4 * Serial ATA2 3Gb/s connectors. SATA 3 & 4 Support RAID 0, 1, JBOD
- **Audio**
- **Ethernet LAN**
 - Realtek ALC662 6-Channel HD Audio CODEC
 - Realtek 8111DL 10/100/1000 LAN

- **USB**
 - **Special Features**
 - **Rear Panel I/O**
 - **Internal I/O**
 - **BIOS**
 - **Functional**
 - **Certificate**
 - **Temperature**
 - **Form Factor**
- Embedded 7 * USB 2.0/1.1
 -
 - Intel Atom Processor D510 / D525
 - Support DC FAN
 - Support CPU Smart Fan
 - 4 * USB 2.0/1.1 ports
 - 1 * PS/2 KB/MS Connector
 - 1 * Audio I/O ports (Line-in, MIC and Line-out) & 1 * Optical Out
 - 1 * VGA port / 1 * DVI-D port / 1 * HDMI port
 - 1 * 12V DC in
 - 1 * Gigabit LAN
 - 2 * USB 2.0 headers for 3 * USB 2.0 ports
 - 3* FAN headers
 - 1 * CD IN /1 * GPIO
 - 1 * AUDIO header
 - 1 * CIR header
 - 1 * COM header
 - 1 * MINI PCI-E connector
 - AMI Flash ROM Write protect
 - Data Storage, medical Equipment, Media Center application, Networking, General Application, Gaming Machine
 - CE, FCC, RoHS
 - Operating within 0~50 centigrade (**Suggest to use system FAN**)
 - Storage within -20-85 centigrade
 - Mini ITX Form Factor(17cmx17cm)

Product Accessories

- COM cable
- Manual
- CD
- 2x SATA cable
- I/O shield
- SATA-Slim ODD Cable+Power