


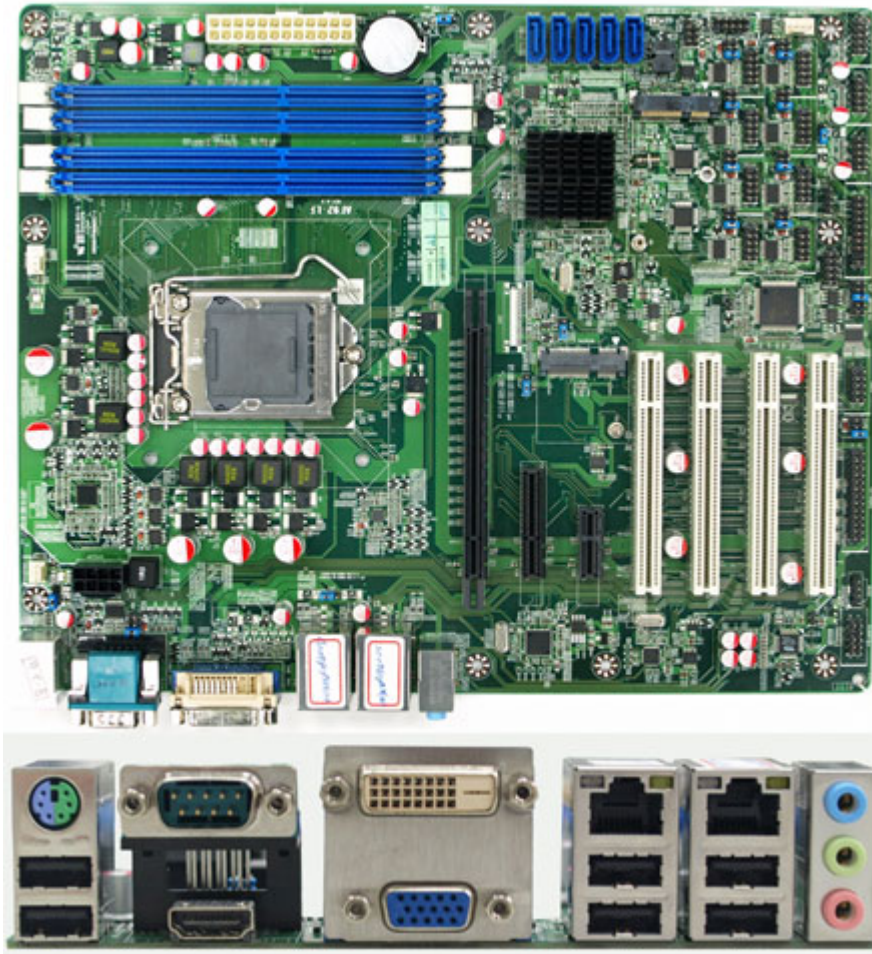

999.00 EUR  
incl. 19% VAT, plus [shipping](#)

- Intel® Q67 Express Chipset
- Supports Intel LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
- Support 4 \* 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 32GB
- Intel 82579LM & 82574L Gigabit LAN
- Intel Active Management Technology ( iAMT 7.0)
- Support TPM 1.2 function
- Support CPU Smart FAN
- Supports ACPI S3 Function
- Support Watch dog Technology
- ATX form factor 305mm x 244mm

|                          |                                                                                         |
|--------------------------|-----------------------------------------------------------------------------------------|
| • <b>CPU</b>             | INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor                                  |
| • <b>Chipset</b>         | INTEL® Q67 Chipset<br>Clock 100MHz                                                      |
| • <b>Memory</b>          | 4 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM<br>Max. up to 32GB                    |
| • <b>Expansion Slots</b> | 1 * PCIe x 16, 4 * PCI, 1 * PCIe x 1, 1 * PCIe x 4<br>1 * MINI PCI-E & 1 * mSATA socket |
| • <b>Storage</b>         | 2 * Serial ATA3 6Gb/s & 3 * Serial ATA2 3Gb/s connectors<br>support RAID 0, 1, 5, 10    |
| • <b>Audio</b>           | VIA VT1705 6-Channel HD Audio CODEC                                                     |
| • <b>Ethernet LAN</b>    | Intel 82579LM & 82574L PCI-E Gigabit Ethernet LAN                                       |
| • <b>USB</b>             | Embedded 12 * USB 2.0/1.1                                                               |

|                           |                                                                                                                                                                                                                                                                                                                |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • <b>Special Features</b> | Support ACPI S3<br>Support CPU Smart FAN<br>Support Watch Dog                                                                                                                                                                                                                                                  |
| • <b>Rear Panel I / O</b> | 6 * USB 2.0/1.1 ports<br>1 * PS2/KB Connector<br>2 * RJ-45 port<br>1 * HDMI port<br>1 * COM port<br>1 * VGA port<br>3 * Audio Phone Jack                                                                                                                                                                       |
| • <b>Internal I / O</b>   | 3 * USB 2.0/1.1 headers for 6 USB 2.0 ports<br>CPU /NB / Chassis Fan connectors<br>1 * Parallel header<br>1 * GPIO header<br>9 * COM header ( COM2 for RS232/422/485)<br>1 * TPM 1.2 header<br>1 * IR header<br>1 * Chassis Intrusion header<br>1 * AUDIO header<br>1 * 24-pin & 8-pin 12V ATX Power connector |
| • <b>BIOS</b>             | AMI EFI 64MB SMT Flash ROM                                                                                                                                                                                                                                                                                     |
| • <b>Form Factor</b>      | ATX form factor ■ 305mm x 244mm ■                                                                                                                                                                                                                                                                              |
| • <b>Functional</b>       | ATM, Automation, medical Equipment, Security, Networking,<br>POS, General Application, Gaming Machine, Transportation                                                                                                                                                                                          |
| • <b>Certificate</b>      | CE, FCC, RoHS                                                                                                                                                                                                                                                                                                  |
| • <b>Temperature</b>      | Operating within 0~60 centigrade<br>Storage within -20-85 centigrade                                                                                                                                                                                                                                           |